

FOR B1 CERTIFICATION

DIGITAL TECHNIQUES ELECTRONIC INSTRUMENT SYSTEMS

Aviation Maintenance Technician Certification Series







72413 U.S. Hwy 40 Tabernash, CO 80478-0270 USA

www.actechbooks.com

+1 970 726-5111



AVIATION MAINTENANCE TECHNICIAN CERTIFICATION SERIES

AuthorJames W. Wasson, Ph.DContributorMike StittLayout/DesignMichael Amrine

About the author:

Dr. James W. Wasson, an accomplished author, is founder and President of Growth Strategies International LLC providing Aerospace and Defense Management Consulting Services to the U.S. Air Force, U.S. Navy and Boeing. He is also a Technology Commercialization Business Consultant to the University of South Carolina Small Business Development Center.

Dr. Wasson was Chief Technology Officer (CTO) at BAE Systems Inc., where he planned and directed new avionics systems product development. He has 20 years of experience as Director of Avionics Engineering, Program Management and Business Development at Smiths Aerospace (now GE Aviation) and as Avionics Engineering Manager at McDonnell Douglas (now Boeing).

He was Chairman of the Graduate Business and Management College for the University of Phoenix West Michigan Campuses and Adjunct Professor. He has a PhD and MBA in International Business Management and a BS in Engineering Technology. He is a licensed FAA Airframe & Powerplant Mechanic and Private Pilot.

Copyright © 2021 — Aircraft Technical Book Company. All Rights Reserved.

No part of this publication may be reproduced, stored in a retrieval system, transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the publisher.

To order books or for Customer Service, please call +1 970 726-5111.

www.actechbooks.com

Printed in the United States of America



For comments or suggestions about this book, please call or write to: 1.970.726.5111 | comments@actechbooks.com

WELCOME

The publishers of this Aviation Maintenance Technician Certification Series welcome you to the world of aviation maintenance. As you move towards EASA certification, you are required to gain suitable knowledge and experience in your chosen area. Qualification on basic subjects for each aircraft maintenance license category or subcategory is accomplished in accordance with the following matrix. Where applicable, subjects are indicated by an "X" in the column below the license heading.

For other educational tools created to prepare candidates for licensure, contact Aircraft Technical Book Company.

We wish you good luck and success in your studies and in your aviation career!

REVISION LOG

VERSION	EFFECTIVE DATE	DESCRIPTION OF CHANGE
001	2016 01	Module Creation and Release
002	2017 03	Format Update/Minor Type Corrections
002.1	2021 05	Formatting Updates - No Content Changes



DIGITAL TECHNIQUES ELECTRONIC INSTRUMENT SYSTEMS

Welcome	iii
Revision Log	iii
Forward	iv
EASA License Category Chart	v
General Knowledge Requirements	v

SUB-MODULE 01

ELECTRONIC INSTRUMENT SYSTEMS

Knowledge Requirements	1.1
Electronic Instrument Systems	1.2
Analog Instruments	1.2
Digital Instruments	1.2
Electronic Displays	1.2
Electronic Flight Instrument System	1.4
Engine Indication And Crew Alerting System	1.7
Questions	1.11
Answers	1.12

SUB-MODULE 02

NUMBERING SYSTEMS

Knowledge Requirements	2.1
Numbering Systems	2.2
Decimal	2.2
Binary	2.2
Place Values	2.2
Binary Number System Conversion	2.3
Octal	2.4
Octal Number System Conversion	2.4
Hexadecimal	2.6
Hexadecimal Number System Conversion	2.6
Binary Coded Decimals	2.7
Questions	2.9
Answers	2.10

SUB-MODULE 03

DATA CONVERSION

Knowledge Requirements	3.1
Data Conversion	3.2
Analog Data	3.2
Digital Data	3.2
Analog To Digital Conversion	3.3
Digital To Analog Conversion	3.4
Questions	3.7
Answers	3.8

SUB-MODULE 04

DATA BUSES

4.1
4.2
4.2
4.4
4.5
4.6
4.6
4.7
4.9
4.10

SUB-MODULE 05

LOGIC CIRCUITS

Knowledge Requirements	5.1
Logic Circuits	5.2
Logic Gates	5.2
NOT Gate	5.2
Buffer Gate	5.3
AND Gate	5.3
OR Gate	5.3
NAND Gate	5.4
NOR Gate	5.5
Exclusive OR Gate	5.5
Exclusive NOR Gate	5.5
Negative Logic Gates	5.5
Digital Circuits	5.6
Aircraft Logic Circuit Applications	5.7
Questions	5.9
Answers	5.10

SUB-MODULE 06

BASIC COMPUTER STRUCTURE

Knowledge Requirements	6.1
Computer Architecture	6.2
Bits, Bytes, And Words	6.3
Software	6.4
Hardware	6.5
Central Processing Unit	6.5
Memory (RAM, ROM, PROM)	6.5
Integrated Circuits	6.6
Aircraft Computer Systems	6.7
Questions	6.9
Answers	6.10





CONTENTS

SUB-MODULE 07

MICROPROCESSORS Knowledge Requirements	
SUB-MODULE 08	

INTEGRATED CIRCUITS

Knowledge Requirements		8.1
------------------------	--	-----

SUB-MODULE 09

MULTIPLEXING	
Knowledge Requirements	 9.1

SUB-MODULE 10

FIBER OPTICS

Knowledge Requirements	10.1
Fiber Optics	10.2
Advantages And Disadvantages	10.2
Fiber Optic Data Bus	10.3
Related Terms	10.3
Terminations	10.3
Couplers And Terminals	10.4
Applications In Aircraft Systems	10.5
Questions	10.7
Answers	10.8

SUB-MODULE 11

ELECTRONIC DISPLAYS

Knowledge Requirements	11.1
Electronic Displays	11.2
Cathode Ray Tubes	11.2
Light Emitting Diodes	11.2
Liquid Crystal Displays	11.3
Active Matrix Liquid Crystal Display	11.5
Questions	11.7
Answers	11.8

SUB-MODULE 12

ELECTROSTATIC SENSITIVE DEVICES

Knowledge Requirements	12.1
Electrostatic Sensitive Devices	12.2
Risks And Possible Damage	12.2
Anti-Static Protection	12.3
Controlled Environment	12.3
Static-Safe Workstation	12.3
Anti-Static Wrist Straps	12.3
Grounding Test Stations	
Ionizers	12.4

Special Handling	12.5
Questions	12.7
Answers	12.8

SUB-MODULE 13

SOFTWARE MANAGEMENT CONTROL

Knowledge Requirements	13.1
Software Management Control	13.2
Restrictions And Catastrophic Effects	13.2
Airworthiness Requirements	13.2
Questions	13.5
Answers	13.6

SUB-MODULE 14

ELECTROMAGNETIC ENVIRONMENT

Knowledge Requirements	14.1
Electromagnetic Environment	14.2
Electromagnetic Interference (EMI)	14.2
High-Intensity Radiated Field (HIRF)	14.3
Lightning/Lightning Protection	14.3
Electromagnetic Compatibility (EMC)	14.4
Questions	14.7
Answers	14.8

SUB-MODULE 15

TYPICAL ELECTRONIC/DIGITAL AIRCRAFT SYSTEMS

Knowledge Requirements	15.1
Digital Aircraft Systems	15.2
Introduction	15.2
Electronic Instrument Systems	15.4
Electronic Flight And Engine Instruments	15.4
Integrated Modular Avionics (IMA), Information	
Systems, And Built-In Test Equipment (BITE)	15.4
Communications, Navigation And	
Surveillance Systems	15.5
Aircraft Communication Addressing	
And Reporting System (ACARS)	15.5
Inertial Navigation System (INS)	15.7
Ring Laser Gyros	15.7
Micro-Electro-Mechanical System (MEMS)	15.8
Global Positioning System (GPS)	15.8
Flight Management System (FMS)	15.9
Traffic Alert And Collision Avoidance	
System (TCAS)	15.10
Flight Control Systems	15.12
Mechanical Flight Control Systems	15.12



Automatic Digital Flight Control Systems	15.13
Cabin Systems	15.15
Questions	15.17
Answers	15.18
Acronym Index	A.1
Index	I.1



ELECTRONIC INSTRUMENT SYSTEMS

ANALOG INSTRUMENTS

Instruments that aid the pilot in controlling the altitude, attitude, airspeed and heading of the aircraft are known as flight instruments. Since the early days of flight there have been four basic flight instruments that have formed the well-known "T" arrangement located in the center of the instrument panel, as shown in *Figure 1-1*. These four basic instruments are 1) the airspeed indicator, located on the top left, that measures the aircraft's speed in nautical miles per hour; 2) the attitude indicator, located on top center, that shows the aircraft's attitude relative to the earth's horizon; 3) the altimeter, on the top right, that displays the barometric altitude as measured in feet; and 4) the gyro-slaved heading indicator, in the bottom center, which shows which direction the aircraft is flying. These 4 basic flight instruments are typically augmented with a turn-and-bank indicator that displays the rate of turn in the roll axis and amount of bank in the yaw axis, and a vertical speed indicator that displays the rate of ascent or descent in feet per minute.

Assuming that the aircraft has radio navigation aids, it will also come equipped with a Radio Magnetic Indicator (RMI) coupled to an Automatic Direction Finder (ADF), and a Course Deviation Indicator (CDI) driven by VHF Omnidirectional Range (VOR) and Instrument Landing System (ILS) receivers. The ILS receiver drives the glide scope needle to set the glide path on an instrument approach and localizer needle provides lateral guidance to the center of the runway. A VHF Marker Beacon may be used in conjunction with the ILS to indicate position along the approach to the runway.

These early flight instruments were analog meaning that they contained either mechanical or electro-mechanical rotating mechanisms to drive the pointer dials on the instruments. For example, an analog airspeed indicator receives air pressure from the pitot tube, which expands a bellows that turns the dial on the indicator. With a digital system, the pitot air pressure enters an air data computer that converts the analog information into a digital data stream. Digital data is then sent to the airspeed indicator via an aircraft data bus where the data is converted back into analog signals to drive a pointer dial and/or is displayed digitally in numbers.



Figure 1-1. Basic Analog Cockpit Flight Instruments.

DIGITAL INSTRUMENTS

With the advent of digital electronics in the early 1970's, Electronic Instrument Systems, also known as "glass cockpits", evolved that were more much more reliable than mechanical or electro-mechanical analog instruments, and had the advantage of combining several flight and navigation functions into one display to provide the crew with greater situational awareness.

The first commercial transport aircraft to employ an Electronic Instrument System (EIS) was the McDonnell Douglas MD-80 in 1979. The EIS on the MD-80 used Cathode Ray Tube (CRT) technology. However, during the next 10 years, Liquid Crystal Display (LCD) technology matured thereby replacing CRTs. Flat-panel LCDs are lighter than CRT displays, require less volume, and consume less electrical power, thereby generating less cockpit heat. Glass cockpit configurations vary widely between aircraft models from a single flight and navigation display in a small private aircraft to five or more LCD displays in a commercial transport aircraft. (*Figure 1-2*)

ELECTRONIC DISPLAYS

The early EIS displays mimicked the analog display formats for ease in pilot training as the crew transitioned from older analog displays to digital displays that were driven by aircraft data computers, known as display processors or symbol generators.





Figure 1-2. Airbus A380 EIS with 8 Large LCD Displays.



Figure 1-3. Equivalent Electromechanical Flight and Navigation Instruments on the left.

Figure 1-3 depicts an early model Boeing 737 instrument panel with an analog Attitude Direction Indicator (ADI) and analog Horizontal Situation Display (HSI) in the left picture, and a later model B737 instrument panel with electronic ADI (EADI) and electronic HSI (EHSI) displays shown in the right picture.

The ADI or EADI is an artificial horizon with lateral bars superimposed to display computer-generated pitch, roll and bank steering commands from the Flight Director computer. The HSI or EHSI is similar to a heading indicator, except that it combines navigation commands from the VHF Omni-Range (VOR) or Global Positioning System (GPS) receivers, which are used for en-route guidance, or from the Instrument Landing System (ILS), which is used for terminal guidance. Besides heading, the HSI/EHSI also provides actual track, desired track, track angle error, drift angle, cross-track deviation, and distance to destination information, from the Distance Measuring Equipment (DME) or Inertial Navigation System (INS). (*Figure 1-4*)



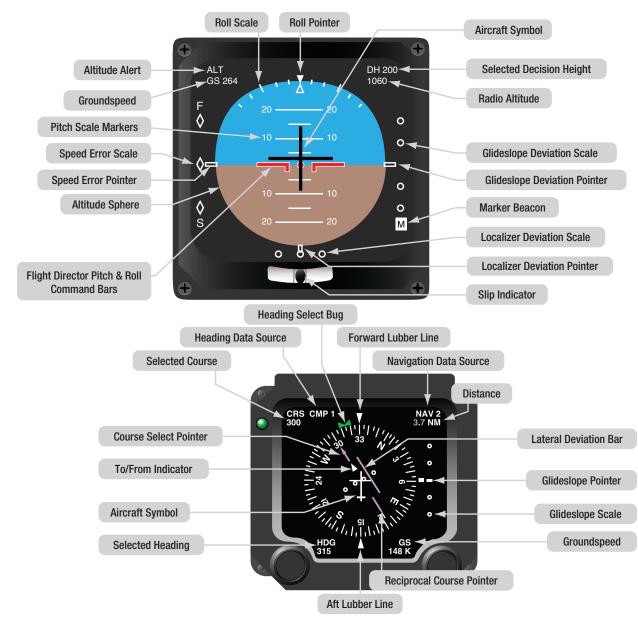


Figure 1-4. Typical EADI (top) and EHSI (bottom) Display Symbology.

The pilot and the co-pilot not only have independent EADI and EHSI displays, but they also have independent Display Processor Units, also known as Symbol Generators, to drive their displays (*Figure 1-5*).

Display formats are produced by the Symbol Generators that receive inputs from the crew and various on-board systems. The Flight Director Systems, Navigation Systems, Air Data Systems, and Weather Radar provide inputs to the Symbol Generators, along with commands from the each crewmember's display control panel. The Symbol Generators produce the graphics for the EADI, EHSI, and an optional Multi-Function Display (MFD) that is mounted in the center instrument panel. The MFD, which is physically identical to the EADI and EHSI, is typically used to display weather radar information; however, it can also be used to display either flight information or navigational information in the event of an EADI or EHSI failure. The following section will discuss the Boeing 777 EIS, which is a more advanced example of the one just covered.

ELECTRONIC FLIGHT INSTRUMENT SYSTEM

The Boeing 777, which first entered service in 1995, has six 8' × 8" multi-color LCD displays as shown in *Figure 1-6*. The B777 EIS consists of a dual-redundant Electronic Flight Instrument Systems (EFIS) and Engine Indication and Crew Alerting System (EICAS).



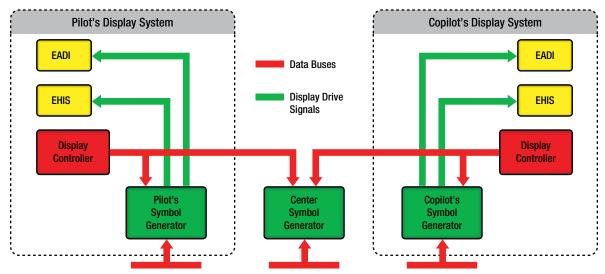


Figure 1-5. Electronic Displays are driven by Symbol Generators.



Figure 1-6. Boeing 777 Electronic Instrument System has 6 LCD Displays.

On the left side of the instrument panel is the Captain's EFIS, consisting of a Primary Flight Display (PFD) located outboard and a Navigation Display (ND) located inboard. The Co-Pilot's EFIS located on the right instrument panel has an identical PFD and ND, located outboard and inboard respectively. All the displays are interchangeable to reduce the number of required spares.

The information shown on each display, whether for flight or navigation, is determined by what each crew member selects on their individual display control panels. The PFD takes the place of the EADI and displays all the information critical to flight, including attitude, airspeed, barometric altitude, vertical speed, heading, flight modes, radio altitude, ILS data, and Traffic Alert and Collision Avoidance System (TCAS) resolution advisory. The PFDs are designed to increase the crew's situational awareness by integrating all of this information into a single composite display instead of the crew having to monitor several independent analog instruments. Also, the colors on the display change to alert the crew to potentially hazardous flight conditions, such as low airspeed, high rate of descent, etc.



Figure 1-7 is a typical Primary Flight Display format showing the artificial horizon in the center of the display, airspeed on the left side, altitude on the right side, heading on the bottom, and flight modes on the top of the display. Notice how the moving ladder format used for altitude and airspeed provide both absolute and relative information so the crew knows not only the exact numeric value, but also the rate that the altitude and airspeed is changing.

The Navigation Display, shown in *Figure 1-8*, takes the place of the EHSI display to show the requisite information to navigate the aircraft, including heading, VOR, GPS, and ILS guidance. The ND has the ability to overlay additional information on the navigation page to eliminate the need for separate dedicated displays. Some examples of information that is typically overlaid on the ND include weather information from either the onboard weather radar (WXR) or ground based sensors, and digital maps showing pre-programmed routes and waypoints from the Flight Management System.




Figure 1-7. Primary flight display format.

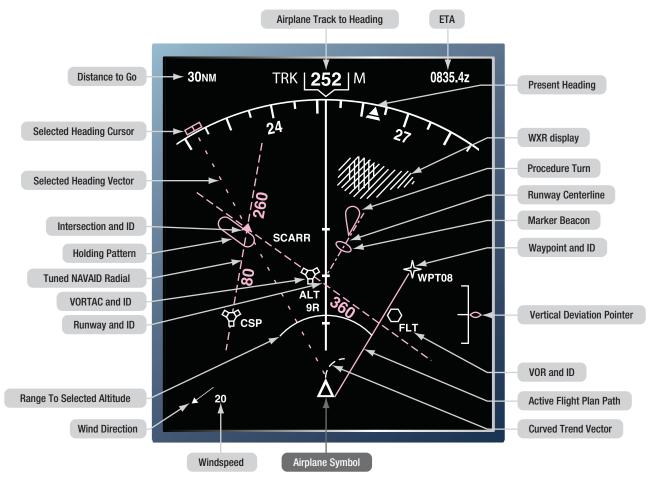


Figure 1-8. Navigation map display format.

